


A PERFECT ALLIANCE.



# ODU-MAC<sup>®</sup> Silver-Line

# ODU DOCK Silver-Line

Compact modular connector system

Up to 6,300V, 25 bar, 10 Gbit/s, 100,000 mating cycles and 9.0 GHz

AUTOMATIC DOCKING

## SHORT OVERVIEW




ODU-MAC<sup>®</sup> SILVER-LINE | ODU DOCK SILVER-LINE

ODU-MAC<sup>®</sup> WHITE-LINE

ODU-MAC<sup>®</sup> BLUE-LINE

# THE PRINCIPLE OF ODU-MAC®


This overview provides you with an insight into the modularity of ODU-MAC®. For more detailed information, please visit our website or consult our ODU-MAC® Silver-Line | ODU DOCK Silver-Line catalog.

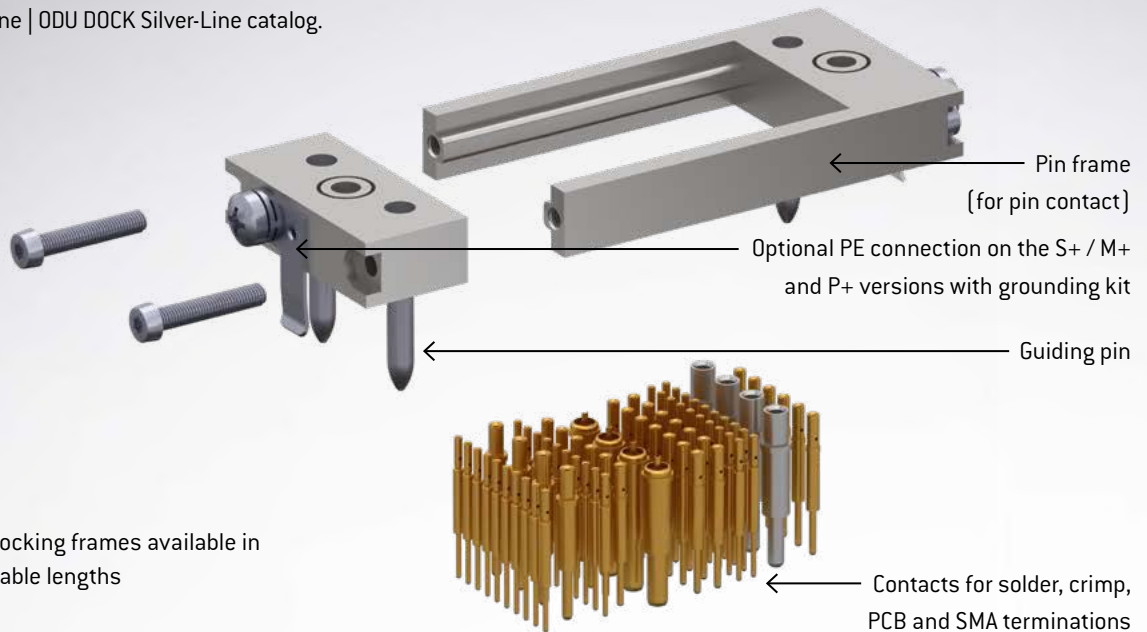

**7** various docking frames available in customizable lengths

**36** modules to choose from:  
 signal, power, high current, high voltage, RF-signal (coax), media such as air or fluid, high-speed data transmission, PE and fiber optic

Removable contacts with clip principle

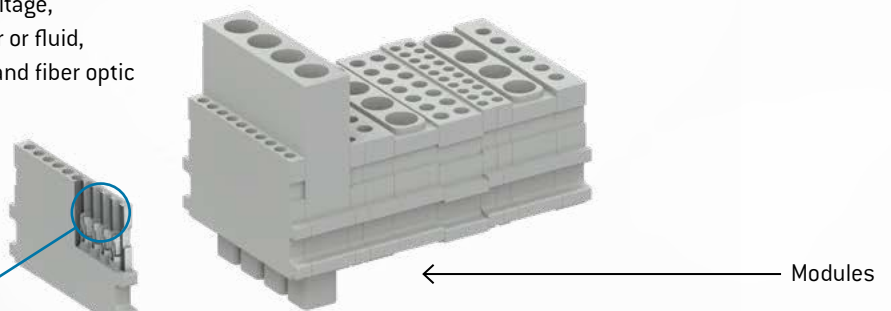

**100.000**  
 Mating cycles  
 and more

## OUTSTANDING – FOR EVERY NEED

Take a closer look at the following pages to discover the variety of transmission methods we offer, such as USB® 1.1<sup>1</sup>, USB® 2.0<sup>1</sup>, USB® 3.2 Gen 1x1<sup>1</sup>, HDMI®<sup>1</sup>, FireWire®<sup>1</sup>, CAT 1<sup>1</sup>, CAT 6<sub>A</sub> and Ethernet.

<sup>1</sup> These ODU specific connectors can transmit common data transmission protocols such as USB® 1.1, USB® 2.0, USB® 3.2 Gen 1x1, HDMI® and FireWire®, but they are not USB®, HDMI®- and FireWire®-standard connectors.

# INDIVIDUALLY CONFIGURED FOR YOUR REQUIREMENTS



The flexible, modular design of ODU-MAC<sup>®</sup> enables multiple connection types to be combined within single contacts.

## ODU-MAC<sup>®</sup> Silver-Line AUTOMATIC DOCKING.

Depending upon your requirements for automatic docking, you can choose from 7 different frame types as a basis for your assembly of modules.

Tolerance compensation from +/- 0.6 mm to +/- 2.5 mm available

### CONVINCING – THE ODU-MAC<sup>®</sup> SYSTEM

- + Versions in the **docking frame** for **automatic docking**
- + **Many different module options** available
- + Extremely compact due to the **high contact density**
- + **Connection cross-sections** from 0.08 mm<sup>2</sup> to 50 mm<sup>2</sup> available
- + Complete solutions incl. **Cable assembly**

#### ODU-MAC<sup>®</sup> L (LARGE)

Frame with higher tolerance compensation and reinforced guiding bushes, as well as extended guiding pins

Tolerance compensation: +/- 1.2 mm



#### ODU-MAC<sup>®</sup> S (STANDARD)

Standard solution for docking tasks

Tolerance compensation: +/- 0.6 mm



#### ODU-MAC<sup>®</sup> S+ (SPECIAL)

The new standard for docking tasks

Tolerance compensation: +/- 1.2 mm



#### ODU-MAC<sup>®</sup> QCH (QUICK CHANGE HEAD)

Docking frames for the highest requirements with regard to mating cycles (connector saver) with the lowest maintenance time and expense thanks to easy exchange of the replacement parts

Tolerance compensation: +/- 0.6 mm



#### ODU-MAC<sup>®</sup> P+ (POWER)

The frame for the highest requirements thanks to reinforced frame design

Tolerance compensation: +/- 2.5 mm



#### ODU-MAC<sup>®</sup> M+ (MINI)


Compact size with the smallest space requirement

Tolerance compensation: +/- 0.6 mm



#### ODU-MAC<sup>®</sup> T (TRANSVERSE)













Transverse frames for installation in customized housing solutions or where low clearance heights make this necessary.



# OVERVIEW OF ALL MODULES




Modules marked with this symbol can be used in the ODU DOCK Silver-Line; note the space requirements.

	Modules	Description	Units /width	Features
Signal		14 contacts for turned contacts  Contact-Ø: 1.02 mm	 7.62 mm	Operating voltage <sup>1</sup> 320 V Rated impulse voltage <sup>1</sup> 2,500 V Max. continuous current <sup>2</sup> 13.5 A for 0.5 mm <sup>2</sup> Degree of pollution <sup>1</sup> 2 Mating cycles minimum 100,000  <b>+ High contact density</b>
		10 contacts for turned contacts  Contact-Ø: 0.76 mm	 2.54 mm	Operating voltage <sup>1</sup> 250 V Rated impulse voltage <sup>1</sup> 1,500 V Max. continuous current <sup>2</sup> 11 A for 0.38 mm <sup>2</sup> Degree of pollution <sup>1</sup> 2 Mating cycles minimum 100,000  <b>+ Highest contact density</b>
		10 contacts for stamped contacts  Contact-Ø: 0.7 mm	 2.54 mm	Operating voltage <sup>1</sup> 32 V Rated impulse voltage <sup>1</sup> 1,500 V Max. continuous current <sup>2</sup> 6 A for 0.38 mm <sup>2</sup> Degree of pollution <sup>1</sup> 2 Mating cycles minimum 5,000  <b>+ Economical solution</b>
		6 contacts for turned contacts  Contact-Ø: 1.02 mm	 5.08 mm	Operating voltage <sup>1</sup> 400 V Rated impulse voltage <sup>1</sup> 3,000 V Max. continuous current <sup>2</sup> 13.5 A for 0.5 mm <sup>2</sup> Degree of pollution <sup>1</sup> 2 Mating cycles minimum 100,000
		5 contacts for turned contacts  Contact-Ø: 1.5 mm	 5.08 mm	Operating voltage <sup>1</sup> 500 V Rated impulse voltage <sup>1</sup> 2,500 V Max. continuous current <sup>2</sup> 27 A for 1.5 mm <sup>2</sup> Degree of pollution <sup>1</sup> 2 Mating cycles minimum 100,000
Power		4 contacts for turned contacts  Contact-Ø: 2.41 mm	 7.62 mm	Operating voltage <sup>1</sup> 500 V Rated impulse voltage <sup>1</sup> 3,000 V Max. continuous current <sup>2</sup> 41 A for AWG 12 Degree of pollution <sup>1</sup> 2 Mating cycles minimum 100,000


<sup>1</sup>Acc. to IEC 60664-1:2007 (VDE 0110-1:2008) for degree of pollution 2.

<sup>2</sup>Definition max. continuous current see ODU-MAC® Silver-Line | ODU DOCK Silver-Line catalog page 197 under [www.odu-connectors.com/downloads/catalogues](http://www.odu-connectors.com/downloads/catalogues)

# OVERVIEW OF ALL MODULES



Modules marked with this symbol can be used in the ODU DOCK Silver-Line; note the space requirements.














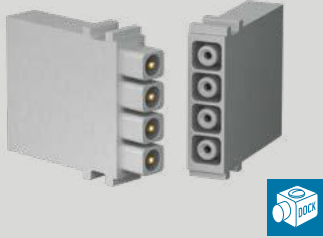



	Modules	Description	Units /width	Features	
Power		3 contacts for turned contacts  Contact-Ø: 3 mm	 7.62 mm	Operating voltage <sup>1</sup> Rated impulse voltage <sup>1</sup> Max. continuous current <sup>2</sup> Degree of pollution <sup>1</sup> Mating cycles	500 V 3,000 V 58 A for 6 mm <sup>2</sup> 2 minimum 100,000
		3 contacts for turned contacts  Contact-Ø: 3 mm	 10.16 mm	Operating voltage <sup>1</sup> Rated impulse voltage <sup>1</sup> Max. continuous current <sup>2</sup> Degree of pollution <sup>1</sup> Mating cycles  	2,500 V 10,000 V 58 A for 6 mm <sup>2</sup> 2 minimum 100,000
		2 contacts for turned contacts  Contact-Ø: 5 mm	 12.7 mm	Operating voltage <sup>1</sup> Rated impulse voltage <sup>1</sup> Max. continuous current <sup>2</sup> Degree of pollution <sup>1</sup> Mating cycles	1,000 V 4,000 V 119 A for 16 mm <sup>2</sup> 2 minimum 100,000
High current		2 contacts for turned contacts with ODU SPRINGTAC <sup>3</sup>  Contact-Ø: 8 mm	 15.24 mm	Operating voltage <sup>1</sup> Rated impulse voltage <sup>1</sup> Max. continuous current <sup>2</sup> Degree of pollution <sup>1</sup> Mating cycles	500 V 3,000 V 142 A for 25 mm <sup>2</sup> 2 minimum 100,000
		2 contacts for turned contacts with ODU LAMTAC <sup>4</sup>  Contact-Ø: 8 mm	 15.24 mm	Operating voltage <sup>1</sup> Rated impulse voltage <sup>1</sup> Max. continuous current <sup>2</sup> Degree of pollution <sup>1</sup> Mating cycles	500 V 3,000 V 154 A for 25 mm <sup>2</sup> 2 minimum 10,000
		1 contact for turned contacts with ODU LAMTAC <sup>4</sup>  Contact-Ø: 10 mm or Contact-Ø: 12 mm	 17.78 mm for both versions	Model Operating voltage <sup>1</sup> Rated impulse voltage <sup>1</sup> Max. continuous current <sup>2</sup> Degree of pollution <sup>1</sup> Mating cycles  	10 mm    12 mm 500 V    400 V 4,000 V    3,000 V 179 A    225 A for 35 mm <sup>2</sup> for 50 mm <sup>2</sup> 2    2 min. 10,000    min. 10,000

<sup>1</sup> Acc. to IEC 60664-1:2007 (VDE 0110-1:2008) for degree of pollution 2. <sup>2</sup> Definition max. continuous current see ODU-MAC<sup>®</sup> Silver-Line | ODU DOCK Silver-Line catalog page 197 under [www.odu-connectors.com/downloads/catalogues](http://www.odu-connectors.com/downloads/catalogues) <sup>3</sup> Contact with springwire technology <sup>4</sup> Contact with lamella technology

# OVERVIEW OF ALL MODULES



Modules marked with this symbol can be used in the ODU DOCK Silver-Line; note the space requirements.

	Modules	Description	Units /width	Features
PE		1 contact for turned contacts with ODU LAMTAC <sup>®3</sup>  Contact-Ø: 10 mm	 12.7 mm	Mating cycles Conductor cross-section minimum 10,000 10 / 16 / 25 mm <sup>2</sup>
High voltage		4 contacts for turned contacts  Contact-Ø: 1.5 mm	 7.62 mm	Operating voltage <sup>1</sup> 2,500 V Rated impulse voltage <sup>1</sup> 10,000 V Max. continuous current <sup>2</sup> 27 A for 1.5 mm <sup>2</sup> Degree of pollution <sup>1</sup> 2 Mating cycles minimum 100,000  
		1 contact  Contact-Ø: 2 mm	 20.32 mm	Operating voltage <sup>1</sup> 6,300 V Rated impulse voltage <sup>1</sup> 20,000 V Degree of pollution <sup>1</sup> 2 Mating cycles minimum 10,000  
RF-signal (coax)		4 contacts for 50 Ω RF-signal (coax) contacts	 7.62 mm	Frequency range 0 to 1.3 GHz Mating cycles minimum 60,000    
		2 contacts for 50 Ω RF-signal (coax) contacts  SMA termination	 12.7 mm	Frequency range 0 to 9.0 GHz Mating cycles minimum 100,000  
		2 contacts for 50 Ω RF-signal (coax) contacts	 12.7 mm	Frequency range 0 to 2.4 GHz Mating cycles minimum 100,000

<sup>1</sup> Acc. to IEC 60664-1:2007 (VDE 0110-1:2008) for degree of pollution 2. <sup>2</sup> Definition max. continuous current see ODU-MAC<sup>®</sup> Silver-Line | ODU DOCK Silver-Line catalog page 197 under [www.odu-connectors.com/downloads/catalogues](http://www.odu-connectors.com/downloads/catalogues) <sup>3</sup>Contact with lamella technology

# OVERVIEW OF ALL MODULES



Modules marked with this symbol can be used in the ODU DOCK Silver-Line; note the space requirements.

	Modules	Description	Units /width	Features	
RF-signal (coax)		2 contacts for 50 $\Omega$ RF-signal (coax) contacts	5 Units 12.7 mm	Frequency range Mating cycles <b>+ High voltage</b> 	0 to 2.8 GHz minimum 100,000
		2 contacts for 75 $\Omega$ RF-signal (coax) contacts	5 Units 12.7 mm	Frequency range Mating cycles	0 to 3.0 GHz minimum 100,000
Compressed air and fluid modules		2 contacts for compressed air valves	5 Units 12.7 mm	Tube diameter Mating cycles <b>+ 20 bar</b>	M5 or max. 4 mm minimum 100,000
		2 contacts for compressed air valves	16 Units 40.64 mm	Tube diameter Inner diameter tube Mating cycles <b>+ 12 bar</b>	max. 6 mm max. 6 mm minimum 100,000
		1 contact for compressed air valve	8 Units 20.32 mm	Tube diameter Inner diameter tube Mating cycles <b>+ 12 bar</b>	max. 6 mm max. 6 mm minimum 100,000
		2 contacts for fluid coupling plug	5 Units 12.7 mm	Tube diameter Mating cycles <b>+ 16 bar</b>	M5 internal thread minimum 100,000

# OVERVIEW OF ALL MODULES




Modules marked with this symbol can be used in the ODU DOCK Silver-Line; note the space requirements.

	Modules	Description	Units /width	Features
Compressed air and fluid modules		1 contact for fluid coupling plug	<div style="border: 1px solid black; padding: 2px; display: inline-block;">9 Units</div> 22.86 mm	Inner diameter tube Mating cycles <span style="background-color: #f96; border-radius: 10px; padding: 2px;">+ 25 bar</span>
Fiber optic		5 contacts for fiber optic contacts for plastic fiber (POF)	<div style="border: 1px solid black; padding: 2px; display: inline-block;">2 Units</div> 5.08 mm	Insertion loss typical Mating cycles <span style="background-color: #f96; border-radius: 10px; padding: 2px;">+ High contact density</span>
		2 contacts for fiber optic contacts for plastic fiber (POF)	<div style="border: 1px solid black; padding: 2px; display: inline-block;">5 Units</div> 12.7 mm	Mating cycles Insertion loss typical minimum 100,000 1.5 dB for 670 nm
		3 contacts for fiber optic contacts for fiber glass (GOF)	<div style="border: 1px solid black; padding: 2px; display: inline-block;">4 Units</div> 10.16 mm	Mating cycles Insertion loss typical minimum 100,000 1 dB for 670 nm
Shielded implementation / high-speed connector		2 to 10 contacts for inserts size 0	<div style="border: 1px solid black; padding: 2px; display: inline-block;">5 Units</div> 12.7 mm	Mating cycles Suitable for all common bus systems USB <sup>®</sup> 1.1 <sup>1</sup> , USB <sup>®</sup> 2.0 <sup>1</sup> , USB <sup>®</sup> 3.2 Gen 1x1 <sup>1</sup> , FireWire <sup>®1</sup> , Ethernet, CAT 5 minimum 10,000
		2 to 14 contacts for inserts size 1	<div style="border: 1px solid black; padding: 2px; display: inline-block;">6 Units</div> 15.24 mm	Suitable for all common bus systems USB <sup>®</sup> 2.0 <sup>1</sup> , Ethernet, CAT 5 <span style="background-color: #f96; border-radius: 10px; padding: 2px;">+ Mating cycles with ODU TURNTAC<sup>®</sup> min. 10,000</span> <span style="background-color: #f96; border-radius: 10px; padding: 2px;">+ Mating cycles with ODU SPRINGTAC<sup>®</sup> min. 60,000</span>











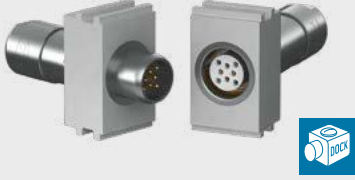






<sup>1</sup>These ODU specific connectors can transmit common data transmission protocols such as USB<sup>®</sup> 1.1, USB<sup>®</sup> 2.0, USB<sup>®</sup> 3.2 Gen 1x1, HDMI<sup>®</sup> and FireWire<sup>®</sup>, but they are not USB<sup>®</sup>-, HDMI<sup>®</sup>- and FireWire<sup>®</sup>-standard connectors.



# OVERVIEW OF ALL MODULES



Modules marked with this symbol can be used in the ODU DOCK Silver-Line; note the space requirements.

	Modules	Description	Units /width	Features
Shielded implementation / high-speed connector		4 to 16 contacts for inserts size 2	 17.78 mm	Suitable for all common bus systems HDMI <sup>1</sup> , Ethernet, CAT 5, CAT 6 <sub>A</sub>
		10 to 30 contacts for inserts size 3	 20.32 mm	Mating cycles minimum 10,000 Suitable for all common bus systems Ethernet <sup>1</sup>
Blank modules/spacer modules / coding modules / pin protection modules		Blank modules	 2.54 mm  7.62 mm   12.7 mm	Used to fill incomplete frames.
		Spacer module	 2.54 mm  5.08 mm   7.62 mm  12.7 mm	Not equipped with retaining clips. The populated pin modules on mating connectors can still be inserted into these spacers without interference. For information on the individual spacer modules please look at the corresponding modules in the ODU-MAC <sup>®</sup> Silver-Line   ODU DOCK Silver-Line catalog.
		Coding modules	 2.54 mm	Arranged between the modules to create keyed guiding system.
		Pin protection modules	 2.54 mm	Used to protect the pins in conjunction with small pin diameters.

<sup>1</sup>These ODU specific connectors can transmit common data transmission protocols such as HDMI<sup>®</sup>, but they are not HDMI<sup>®</sup>-standard connectors.

# THE PRINCIPLE OF ODU DOCK

**Silver-Line**

This overview provides you with an insight into the modularity of ODU DOCK Silver-Line. For more detailed information, please visit our website or consult our ODU-MAC® Silver-Line | ODU DOCK Silver-Line catalog.

**100,000**  
Mating cycles  
and more

## ODU DOCK SILVER-LINE AT A GLANCE

**3**

Available docking plate thicknesses: 10 mm, 14 mm, 20 mm

**2**

Contact surfaces

**32**

Modules to choose from:  
Signal, power, high current, high voltage, RF-signal (coax), media such as air or fluid, high-speed data transmission or fiber optic

**15**

Versions with different numbers of contacts for signal, power, and hybrid transmission

**2**


Housing versions:  
(optional with EMC protection)



Aluminum nickel-plated



Plastic

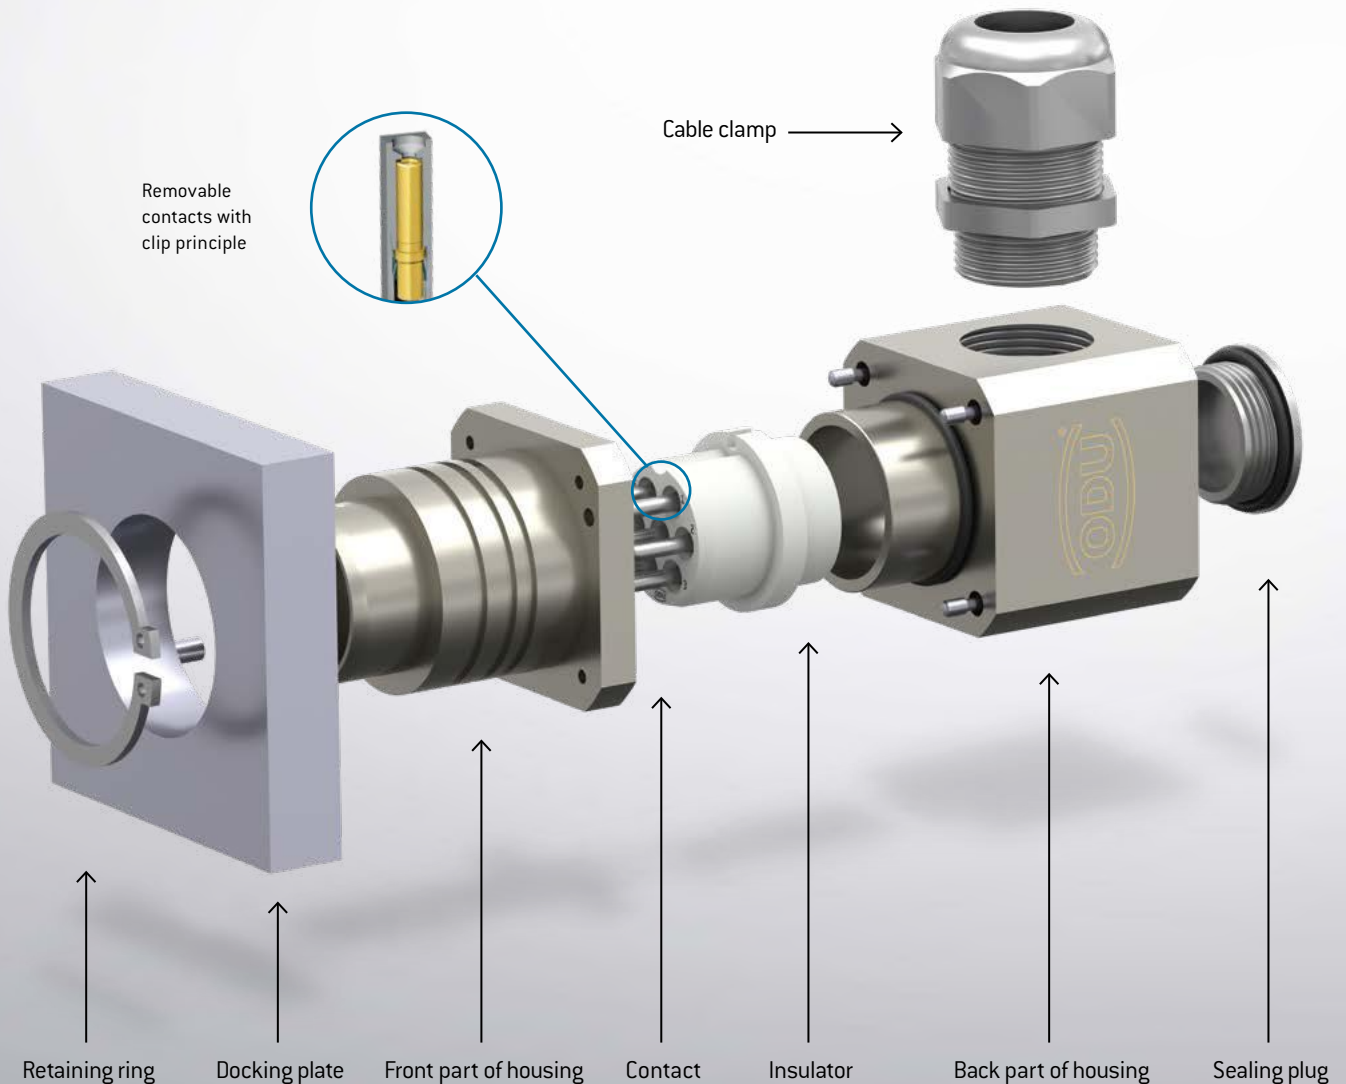


# ODU DOCK **Silver-Line**

## FOR AUTOMATIC DOCKING AND ROBOT SYSTEMS


The high load requires an especially robust connection system with contact stability. The ODU DOCK Silver-Line connectors with their unique spring-wire technology offer a perfect solution here that has been designed for 100,000 mating cycles and more.

### ADVANTAGES OF ODU DOCK SILVER-LINE

- + **Robust aluminum** or **plastic** housing
- + **3 sizes** available
- + 3 – 37 contact inserts
- + **Durability** by ODU SPRINGTAC®
- + **IP65** in mated condition
- + **EMC protection** available
- + **Contacts with clip-principle** for easy assembly
- + **Quick Change Head (QCH)** for low maintenance

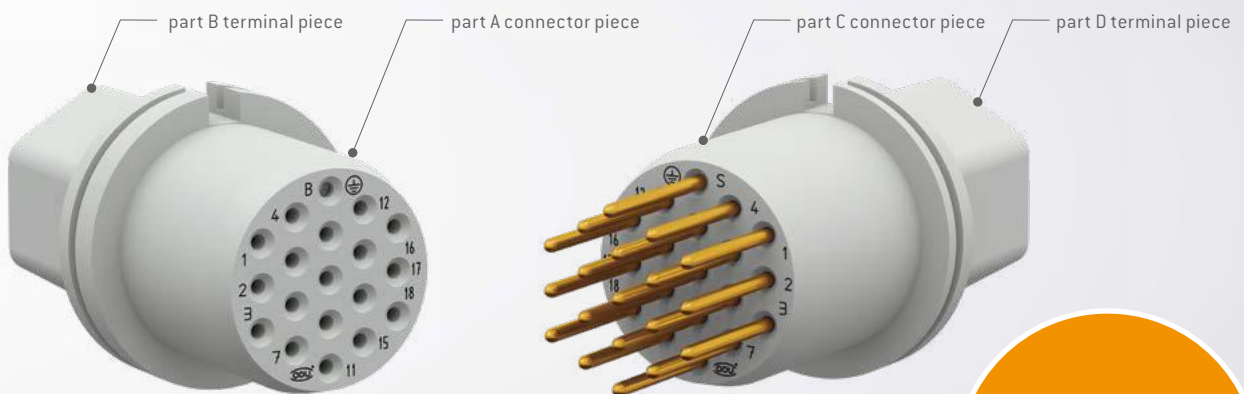

**10 Million**  
Mating cycles  
and more

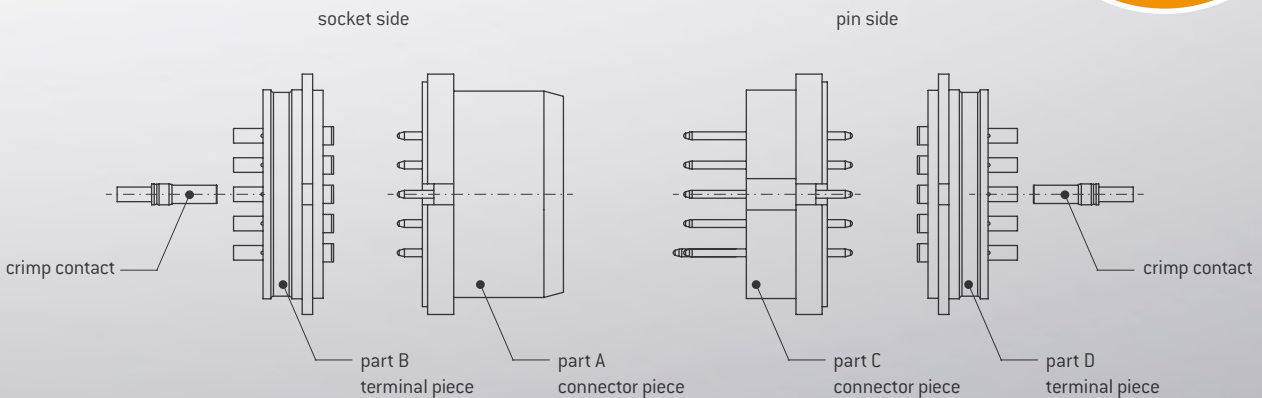

Base parts stay wired. The exchangeable connector pieces are plugged in. The contacts on terminal piece B and D are crimp contacts.. For possible Quick Change Head (QCH) inserts see insert overview.

# OVERVIEW OF ALL CONTACT INSERTS



Size	Contact insert	Features
1		<b>2+PE</b> Contact-Ø 3 mm Conductor cross-section 2.5 / 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 630 V Rated impulse voltage <sup>1</sup> 4,000 V Nominal current <sup>2</sup> 25 A
		<b>6+PE</b> Contact-Ø 2 mm Conductor cross-section 1.5 / 1 mm <sup>2</sup> Operating voltage <sup>1</sup> 500 V Rated impulse voltage <sup>1</sup> 3,000 V Nominal current <sup>2</sup> 18 A
		<b>18+PE</b> Contact-Ø 1.02 mm Conductor cross-section 1 / 0.38 – 0.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 630 V Rated impulse voltage <sup>1</sup> 3,000 V Nominal current <sup>2</sup> 12 A
		<b>31</b> Contact-Ø 0.76 mm Conductor cross-section 0.38 / 0.08 – 0.25 mm <sup>2</sup> Operating voltage <sup>1</sup> 320 V Rated impulse voltage <sup>1</sup> 2,500 V Nominal current <sup>2</sup> 7.5 A
		<b>2+PE+9</b> Contact-Ø 1.5 / 1.02 mm Conductor cross-section 1.5 / 0.38 – 0.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 800 V Rated impulse voltage <sup>1</sup> 4,000 V Nominal current <sup>2</sup> 18 A
		<b>6+PE Quick Change Head</b> Contact-Ø 2 mm Conductor cross-section 0.5 – 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 160 V Rated impulse voltage <sup>1</sup> 2,500 V Nominal current <sup>2</sup> 16 A
		<b>18+PE Quick Change Head</b> Contact-Ø 1 mm Conductor cross-section 0.5 – 1 mm <sup>2</sup> Operating voltage <sup>1</sup> 400 V Rated impulse voltage <sup>1</sup> 3,000 V Nominal current <sup>2</sup> 12 A

<sup>1</sup>Acc. to IEC 60664-1:2007 (VDE 0110-1:2008) for degree of pollution 2. <sup>2</sup>Determined acc. to IEC 60512-5-1:2002 (DIN EN 60512-5-1:2003) at a temperature increase of 45 K; When determining the current-carrying capacity for a fully equipped insert, take the reduction factor into account.

# OVERVIEW OF ALL CONTACT INSERTS



Size	Contact insert	Features
2		<b>3+PE+4</b> Contact-Ø 3 / 1.5 mm Conductor cross-section 4 / 2.5 / 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 1,600 V Rated impulse voltage <sup>1</sup> 8,000 V Nominal current <sup>2</sup> 35 A
		<b>4+PE</b> Contact-Ø 3 mm Conductor cross-section 2.5 / 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 800 V Rated impulse voltage <sup>1</sup> 4,000 V Nominal current <sup>2</sup> 25 A
		<b>6+PE</b> Contact-Ø 3 mm Conductor cross-section 2.5 / 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 800 V Rated impulse voltage <sup>1</sup> 4,000 V Nominal current <sup>2</sup> 25 A
		<b>15+PE</b> Contact-Ø 2 mm Conductor cross-section 1 / 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 400 V Rated impulse voltage <sup>1</sup> 3,000 V Nominal current <sup>2</sup> 18 A
		<b>6+PE Quick Change Head</b> Contact-Ø 3 mm Conductor cross-section 0.5 – 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 400 V Rated impulse voltage <sup>1</sup> 4,000 V Nominal current <sup>2</sup> 18 A
		<b>15+PE Quick Change Head</b> Contact-Ø 2 mm Conductor cross-section 0.5 – 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 160 V Rated impulse voltage <sup>1</sup> 2,500 V Nominal current <sup>2</sup> 16 A

<sup>1</sup>Acc. to IEC 60664-1:2007 (VDE 0110-1:2008) for degree of pollution 2. <sup>2</sup>Determined acc. to IEC 60512-5-1:2002 (DIN EN 60512-5-1:2003) at a temperature increase of 45 K; When determining the current-carrying capacity for a fully equipped insert, take the reduction factor into account.

# OVERVIEW OF ALL CONTACT INSERTS



Size	Contact insert	Features
3		<p><b>2+PE</b></p> <p>Contact-Ø 6 mm                      Conductor cross-section 16 / 6 / 2.5 mm<sup>2</sup>                      Operating voltage<sup>1</sup> 1,600 V                      Rated impulse voltage<sup>1</sup> 6,000 V                      Nominal current<sup>2</sup> 80 A</p>
		<p><b>4+PE</b></p> <p>Contact-Ø 6 mm                      Conductor cross-section 16 mm<sup>2</sup>                      Operating voltage<sup>1</sup> 1,250 V                      Rated impulse voltage<sup>1</sup> 6,000 V                      Nominal current<sup>2</sup> 80 A</p>
		<p><b>6+PE</b></p> <p>Contact-Ø 3 mm                      Conductor cross-section 10 / 6 / 4 / 1.5 mm<sup>2</sup>                      Operating voltage<sup>1</sup> 1,600 V                      Rated impulse voltage<sup>1</sup> 6,000 V                      Nominal current<sup>2</sup> 65 A</p>
		<p><b>13+PE</b></p> <p>Contact-Ø 3 mm                      Conductor cross-section 4 / 2,5 / 1.5 mm<sup>2</sup>                      Operating voltage<sup>1</sup> 1,600 V                      Rated impulse voltage<sup>1</sup> 5,000 V                      Nominal current<sup>2</sup> 35 A</p>
		<p><b>26+PE</b></p> <p>Contact-Ø 1.5 mm                      Conductor cross-section 1.5 / 0.38 – 0.5 mm<sup>2</sup>                      Operating voltage<sup>1</sup> 800 V                      Rated impulse voltage<sup>1</sup> 4,000 V                      Nominal current<sup>2</sup> 18 A</p>
		<p><b>36+PE</b></p> <p>Contact-Ø 1.5 mm                      Conductor cross-section 1.5 / 0.38 – 0.5 mm<sup>2</sup>                      Operating voltage<sup>1</sup> 800 V                      Rated impulse voltage<sup>1</sup> 4,000 V                      Nominal current<sup>2</sup> 18 A</p>

<sup>1</sup>Acc. to IEC 60664-1:2007 (VDE 0110-1:2008) for degree of pollution 2. <sup>2</sup>Determined acc. to IEC 60512-5-1:2002 (DIN EN 60512-5-1:2003) at a temperature increase of 45 K; When determining the current-carrying capacity for a fully equipped insert, take the reduction factor into account.

# OVERVIEW OF ALL CONTACT INSERTS




Size	Contact insert	Features
3		<b>26+PE Quick Change Head</b> Contact-Ø 1.5 mm Conductor cross-section 0.5 – 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 200 V Rated impulse voltage <sup>1</sup> 3,000 V Nominal current <sup>2</sup> 16 A
		<b>36+PE Quick Change Head</b> Contact-Ø 1.5 mm Conductor cross-section 0.5 – 1.5 mm <sup>2</sup> Operating voltage <sup>1</sup> 160 V Rated impulse voltage <sup>1</sup> 2,500 V Nominal current <sup>2</sup> 16 A
		<b>13+PE Quick Change Head</b> Contact-Ø 3 mm Conductor cross-section 2.5 – 4 mm <sup>2</sup> Operating voltage <sup>1</sup> 630 V Rated impulse voltage <sup>1</sup> 5,000 V Nominal current <sup>2</sup> 30 A

**ODU DOCK <sup>Silver-Line</sup> WITH ODU-MAC<sup>®</sup> MODULES**

Due to the combination of two proven ODU products you can arrange the inserts individually:


- Combination of ODU DOCK Silver-line housings size 3 with integrated modules from the ODU-MAC<sup>®</sup> program
- Space for 8 units (1 unit = 2.54 mm)
- Insulator material: PBT
- Suitable modules are marked in the ODU-MAC<sup>®</sup> module overview

<sup>1</sup> Acc. to IEC 60664-1:2007 (VDE 0110-1:2008) for degree of pollution 2. <sup>2</sup> Determined acc. to IEC 60512-5-1:2002 (DIN EN 60512-5-1:2003) at a temperature increase of 45 K: When determining the current-carrying capacity for a fully equipped insert, take the reduction factor into account.



A PERFECT ALLIANCE.

## ODU GROUP WORLDWIDE

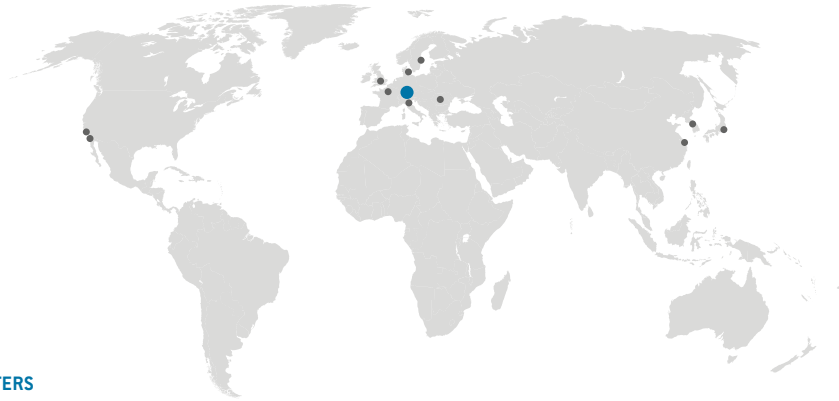

### HEADQUARTERS

#### ODU GmbH & Co. KG

Pregelstraße 11, 84453 Mühldorf a. Inn, Germany  
Phone: +49 8631 6156-0, Fax: +49 8631 6156-49, E-mail: sales@odu.de

### SALES LOCATIONS

#### ODU (Shanghai)

International Trading Co., Ltd.  
Phone: +86 21 58347828-0  
E-mail: sales@odu.com.cn  
www.odu.com.cn

#### ODU Japan K.K.

Phone: +81 3 6441 3210  
E-mail: sales@odu.co.jp  
www.odu.co.jp

#### ODU-UK Ltd.

Phone: +44 330 002 0640  
E-mail: sales@odu-uk.co.uk  
www.odu-uk.co.uk

#### ODU Denmark ApS

Phone: +45 2233 5335  
E-mail: sales@odu-denmark.dk  
www.odu-denmark.dk

#### ODU Korea Inc.

Phone: +82 2 6964 7181  
E-mail: sales@odu-korea.kr  
www.odu-korea.kr

#### ODU-USA, Inc.

Phone: +1 805 484-0540  
E-mail: sales@odu-usa.com  
www.odu-usa.com

#### ODU France SARL

Phone: +33 1 3935-4690  
E-mail: sales@odu.fr  
www.odu.fr

#### ODU Romania Manufacturing S.R.L.

Phone: +40 269 704638  
E-mail: sales@odu-romania.ro  
www.odu-romania.ro

#### Further information and specialized representatives can be found at:

[www.odu-connectors.com/contact](http://www.odu-connectors.com/contact)

#### ODU Italia S.R.L.

Phone: +39 331 8708847  
E-mail: sales@odu-italia.it  
www.odu-italia.it

#### ODU Scandinavia AB

Phone: +46 176 18262  
E-mail: sales@odu.se  
www.odu.se

### PRODUCTION AND LOGISTICS SITES

- Germany** Otto Dunkel GmbH
- China** ODU (Shanghai) Connectors Manufacturing Co.Ltd
- Mexico** ODU Mexico Manufacturing S.R.L. de C.V.
- Romania** ODU Romania Manufacturing S.R.L.
- USA** ODU North American Logistics



Simply scan the QR code to download the entire publication.

All dimensions are in mm. Some figures are for illustrative purposes only. Subject to change without notice. Errors and omissions excepted. We reserve the right to change our products and their technical specifications at any time in the interest of technical improvement. This publication supersedes all prior publications. This publication is also available as a PDF file that can be downloaded from [www.odu-connectors.com](http://www.odu-connectors.com)

ODU-CK-MOE

ODU-MAC® SILVER-LINE  
ODU DOCK SILVER-LINE

ODU-MAC® SILVER-LINE | ODU DOCK SILVER-LINES SHORT OVERVIEW / 01/20 / EN