
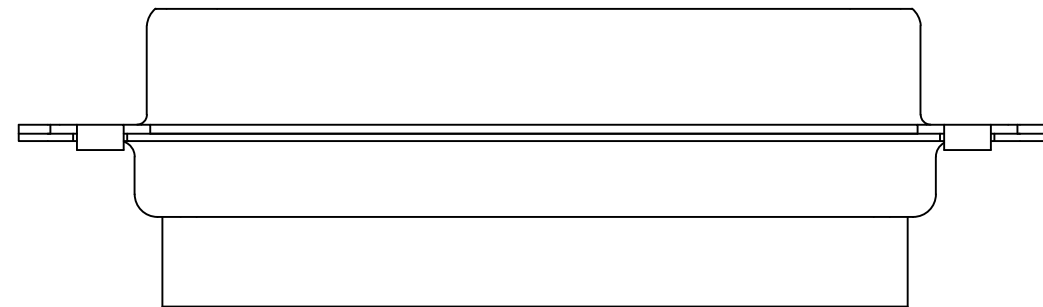
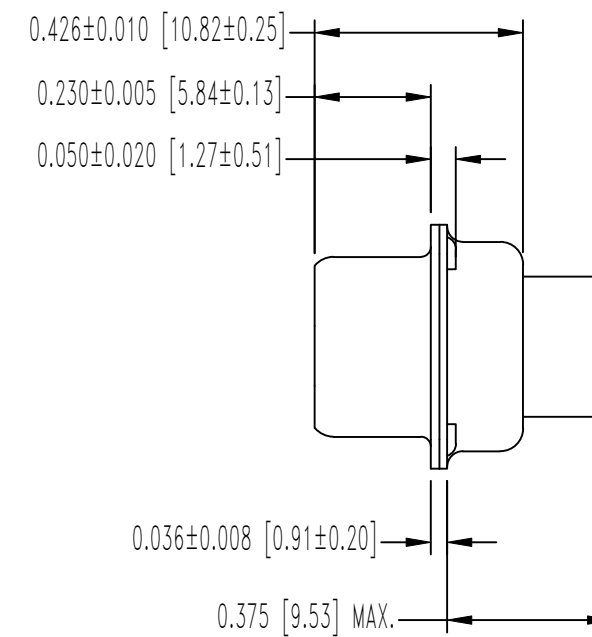


SK24561

DATE	REV	REVISION RECORD	APP	DR	CK
11-11-18	A	ECO 63085	RK	ND	AP

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

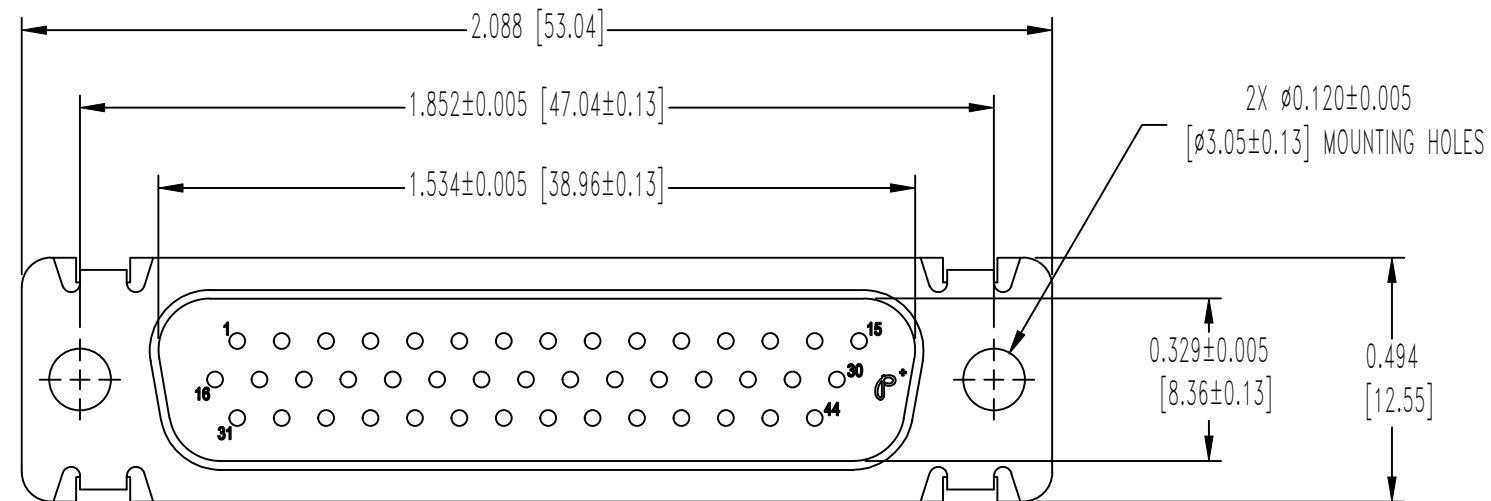

## NOTES:

## 1. MATERIALS &amp; FINISHES:


INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR: BLUE.

SHELLS: STAINLESS STEEL, PASSIVATED.

## 2. DETAILED PRODUCT, ELECTRICAL AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUBMINIATURE PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.

## 3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.

## 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



**POSITRONIC INDUSTRIES INC.**  
SPRINGFIELD, MISSOURI 65801



DECIMAL TOL.  
± 0.015 [0.38]

ANGULAR TOL.  
± 5°

DD SERIES

SCALE  
N.T.S.

DRAWN BY ND  
APPROVED BY RK

DD44M0000S/AA

DATE 11-11-18 DRAWING NUMBER SK24561 REV. A