
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

		DD44S0000S/AA			
DATE	REV	REVISION RECORD	APP	DR	CK
11-04 20	A	ECO 78192	PA	PY	AB

2.088 [53.04]	2	20±0.005
		5±0.13]
<b>─</b> 1.511±0.005 [38.38±0.13] <b>─</b>	MOUNTIN	G HOLES
		<u> </u>
	0.311±0.005 [7.90±0.13]	0.494 [12.55]



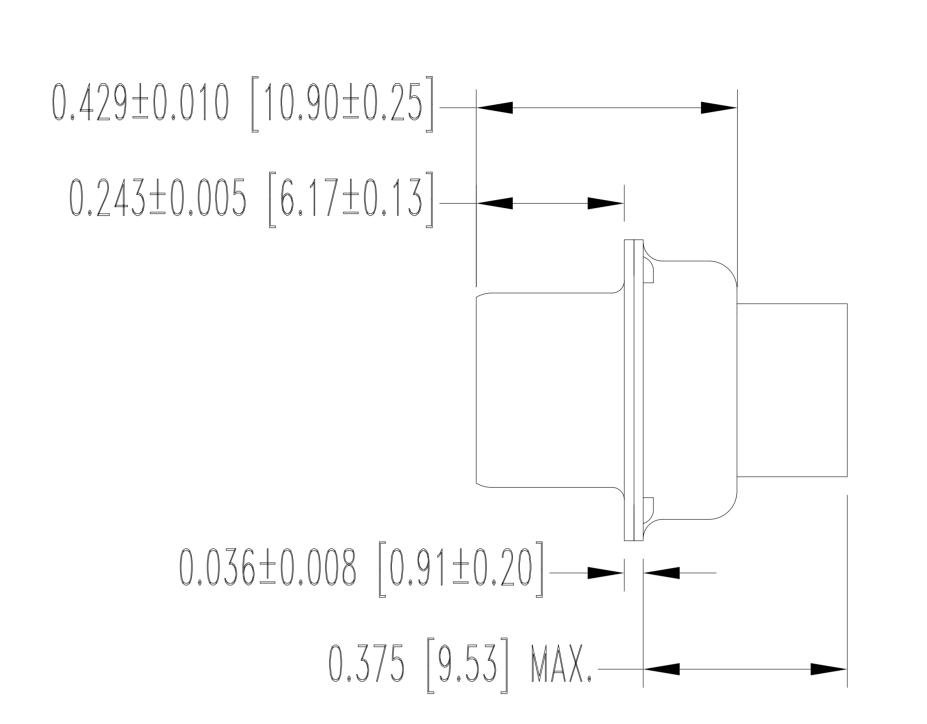

## NOTES:

- 1. MATERIALS AND FINISHES:
  - INSULATOR: GLASS FILLED POLYESTER PER ASTM-D5927, UL 94V-0, COLOR: BLUE.
  - SHELLS: STAINLESS STEEL, PASSIVATED.
- 2. DETAILED PRODUCT, MECHANICAL AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.
- 3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
- 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

