


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DD78S0000S/AA

DATE	REV	REVISION RECORD	APP	DR	CK
04-03-19	A	ECO 66201	RK	ND	AP

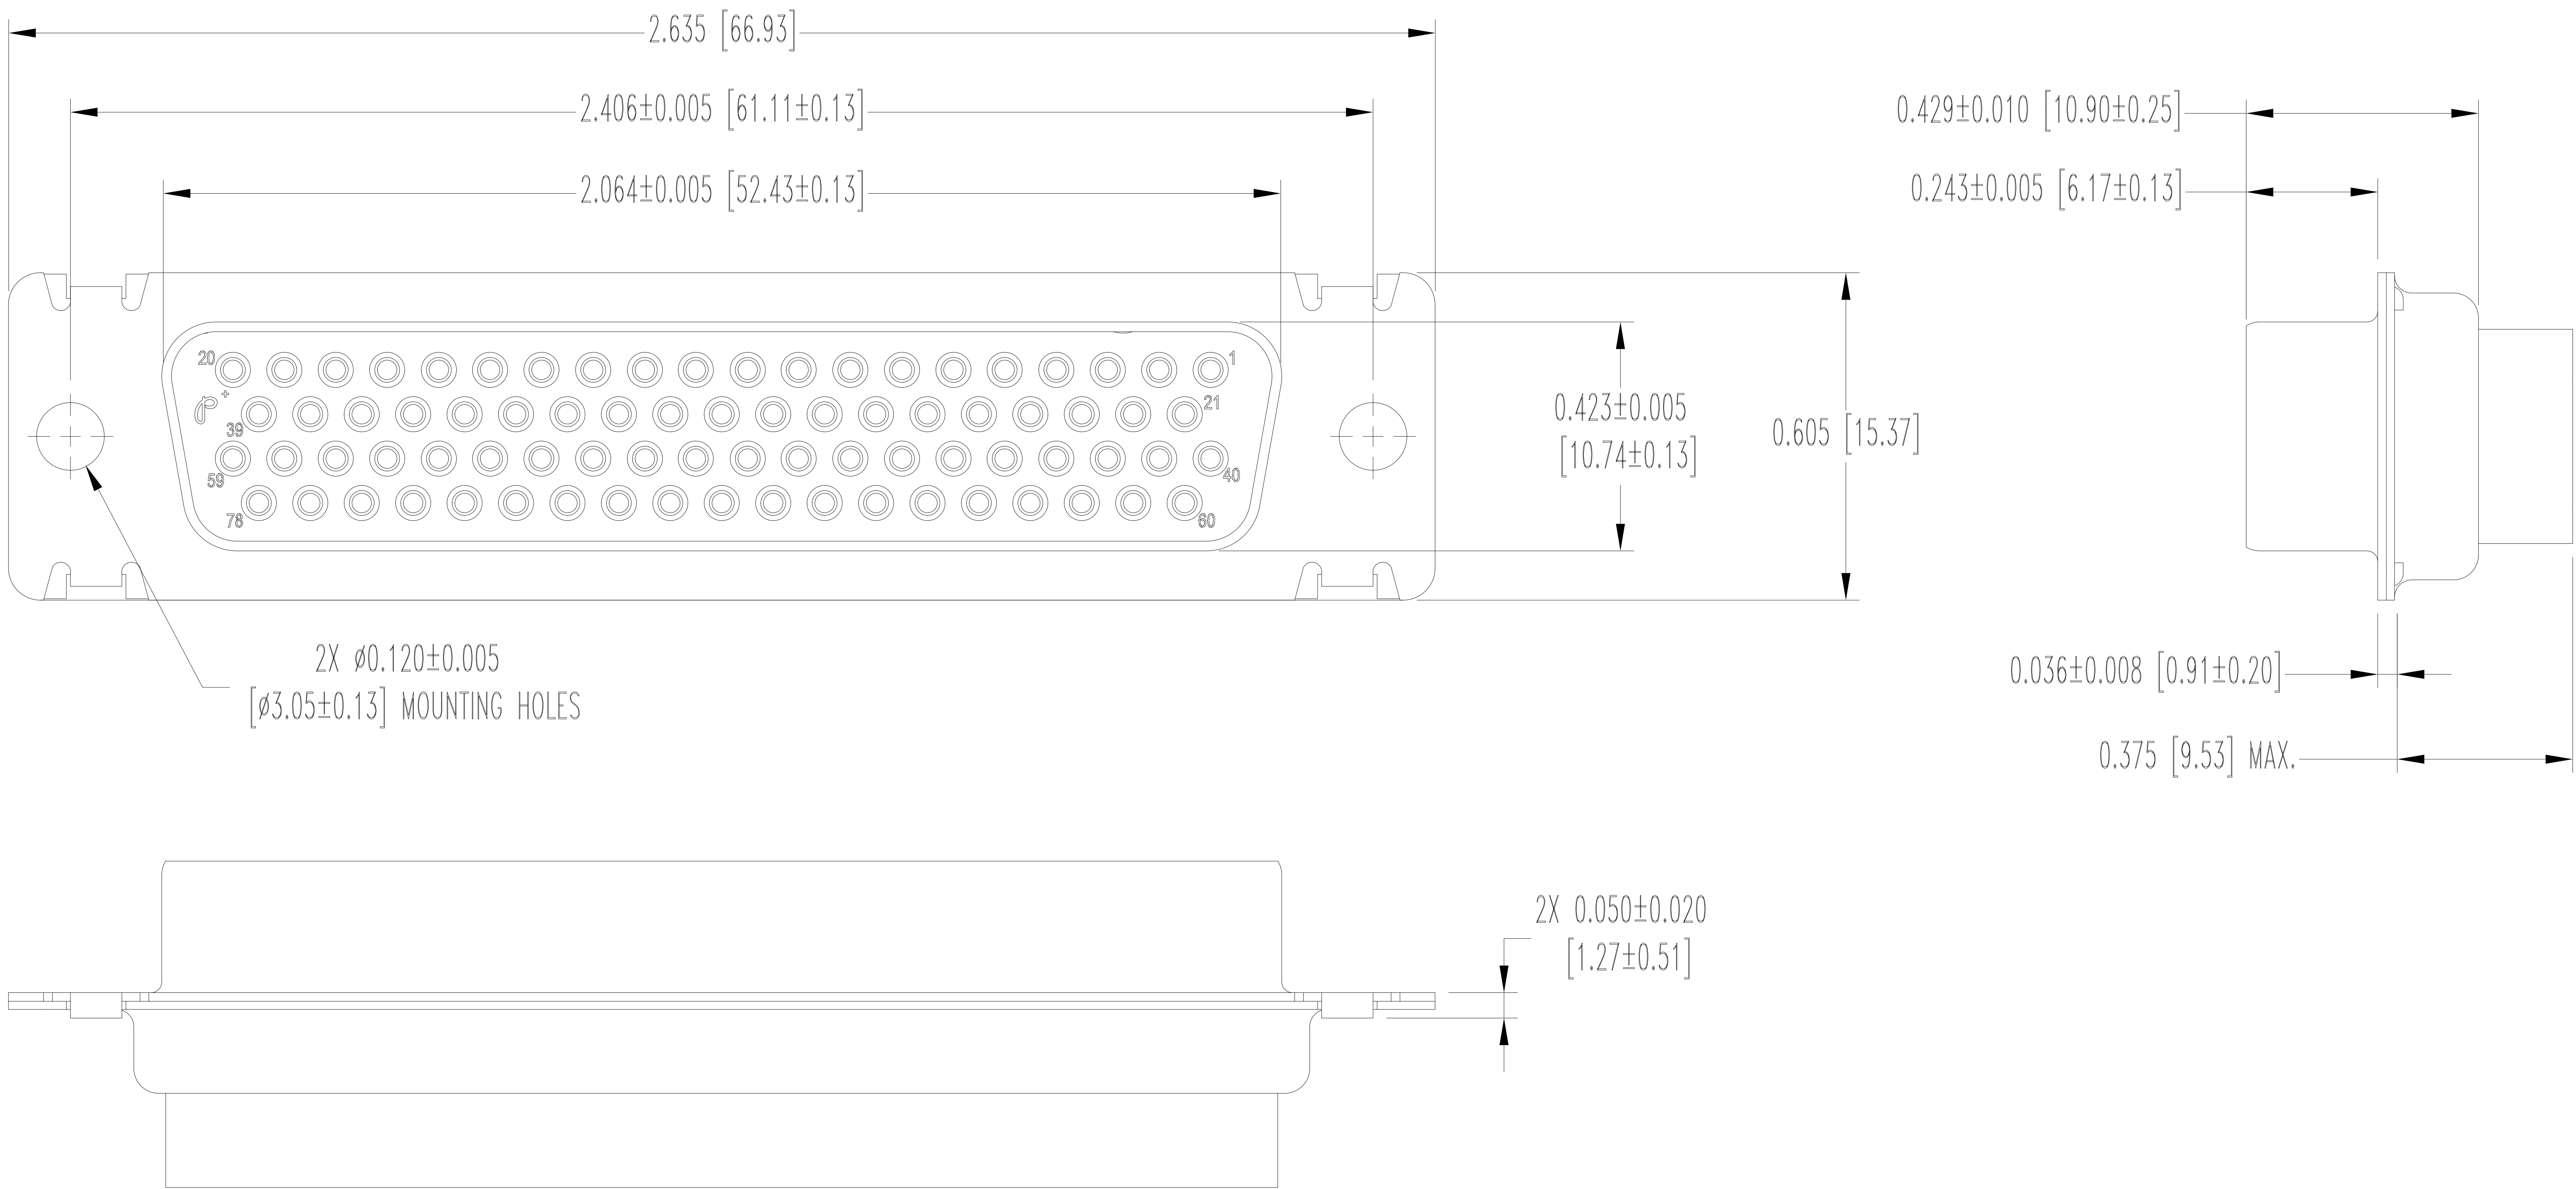

NOTES:

- MATERIALS & FINISHES:  
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR: BLUE.  
SHELLS: STAINLESS STEEL, PASSIVATED.
- DETAILED PRODUCT, ELECTRICAL AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUBMINIATURE PRODUCT PUBLICATION AT [CONNECTPOSITRONIC.COM](http://CONNECTPOSITRONIC.COM).
- CONNECTORS ARE COMPLIANT TO THE CURRENT RoHS DIRECTIVE.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.

SPRINGFIELD, MISSOURI 65801



DECIMAL TOL.

± 0.015 [0.38]



ANGULAR TOL.

± 5°

DD SERIES

TITLE

DD78S0000S/AA

DATE

04-03-19

DRAWING NUMBER

DD78S0000S/AA

REV.

A

SCALE

N.T.S.

DRAWN BY

ND

APPROVED BY

RK